


LED CANOPY


Energy efficient LED canopy designed to provide high uniformity and excellent vertical light distribution while adding safety and security to perimeter lighting.

- Easy installation, Suitable for J-Box mounting
- Enhance safety and security; ideal lighting for 24hr / 7day locations
- Sealed die-cast white profile for indoor and outdoor applications
- Low glare designed polycarbonate optical lens
- Increase energy savings with bi-level Motion sensor
- IP66 rated, UL/cUL wet location and DLC Premium
- Applications: garages, porches, breezeway, perimeter lighting, entryways

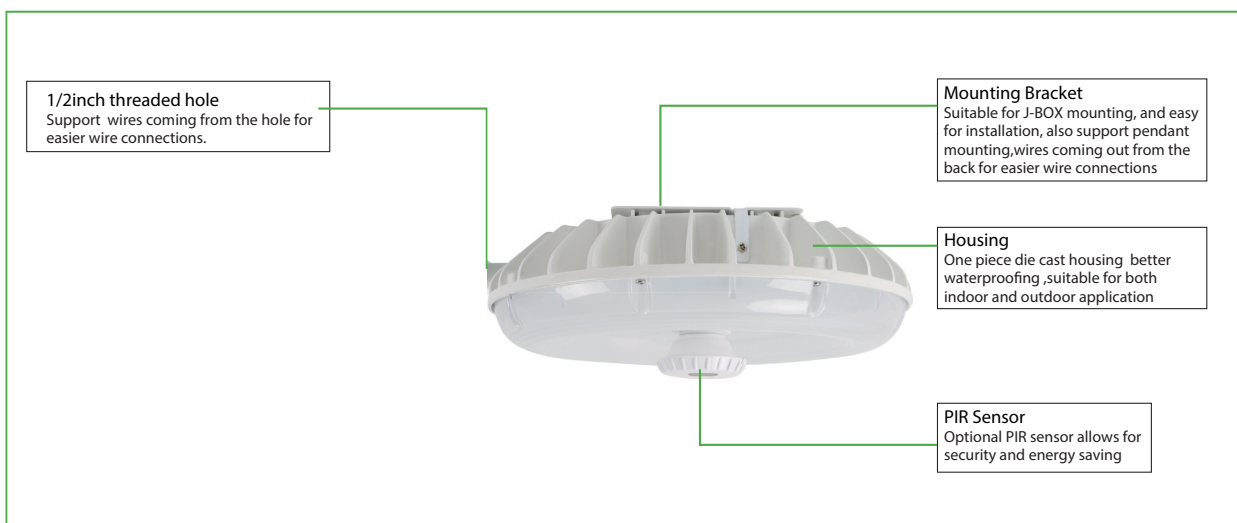


PART #:	Wattage	Lumens	CCT	Voltage	DIM	Weight
CLSMCP0330W27V40KWMDPG	30W	3600 LM	4000K	120-277	0-10V	5.3 lb
CLSMCP0330W27V50KWMDPG	30W	3600 LM	5000K	120-277	0-10V	5.6 lb
CLSMCP0345W27V40KWMDPG	45W	5000 LM	4000K	120-277	0-10V	5.4 lb
CLSMCP0345W27V50KWMDPG	45W	5000 LM	5000K	120-277	0-10V	5.4 lb
CLSMCP0360W27V40KWMDPG	60W	7000 LM	4000K	120-277	0-10V	5.8 lb
CLSMCP0360W27V50KWMDPG	60W	7100 LM	5000K	120-277	0-10V	5.8 lb
Power Factor:	≥ 0.9					
THD:	≤ 15%					
CRI:	> 70					
Operating Temp:	-40°F to 122°F					
Lifetime:	> 50,000 hr					
Dimensions:	See Diagram					
Warranty:	5 Years					
Certifications:	UL Wet Certified, DLC					

Optional PIR Motion Sensor, Emergency Battery Backup

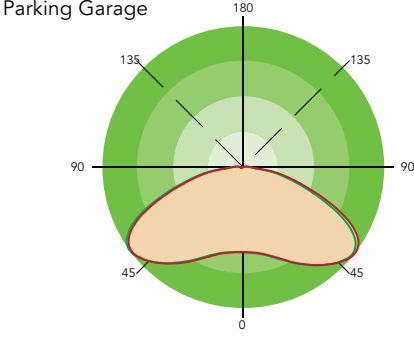

DIMENSIONS:
unit: inch/mm

Weight:
30W: 5.3lb
45W: 5.4lb
60W: 5.73lb

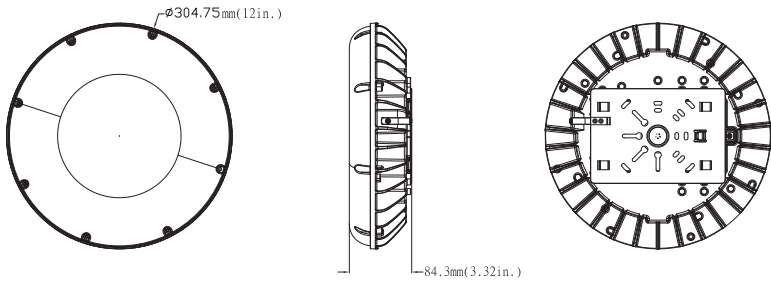

Weight:
30W: 5.576lb
45W: 5.686lb
60W: 6.016lb

