




LED UFO HIGH BAY






Features


1. Fins design, advective holes and grooves in each fin, good for heat dissipation;
2. The wide input voltage range AC100-277V & AC277-480V (1-10V dimming);
Sosen driver, 2835 LUMILEDS LED as light source;
3. Professional light distribution technique, high light reflectivity reflectors, 110° beam angle available; The lens pass rate is over 90%
4. Light weight and small size, save about half shipping costs.

Product Dimension

1. Rings type:

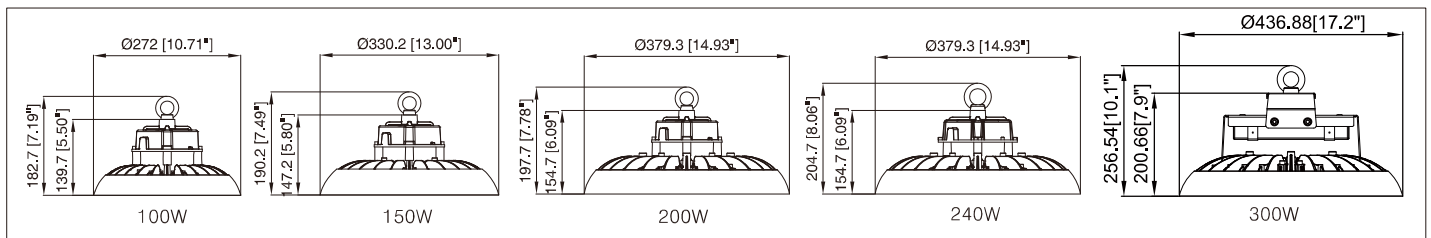

2. Hook type:

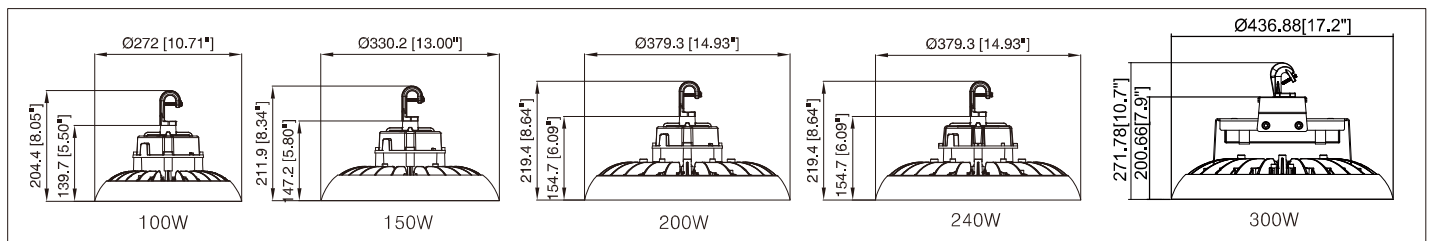

Lighting Parameters

Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	LED Driver	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp shell
UFO10B-100W-110-H-XXK	100W	AC 100-277V	4000K 5000K 5700K	2835 LUMILEDS	SOSEN	110°	135lm/W	Ra>80	-40°F~-113°F -40°C~-45°C	-40°F~-158°F -40°C~-70°C	Wet Location	≥50000H	Black & White
UFO15B-150W-110-H-XXK	150W												
UFO24B-200W-110-H-XXK	200W												
UFO24B-240W-110-H-XXK	240W				AC 277-480V	ESD	150lm/W						
UFO30-300W-110-H-HV-50K	300W												

Installation Instruction

1. Rings type:

1. Use a wrench to fix the nut and then put the ring knob on the bracket;

Ring
Bracket
Gasket
Nuts
wrench

2. Use 4pcs screws to lock the ring & bracket assembly to the lamp body;

screw

3. Hang up the light.

2. Hook type:

1. Use a wrench to fix the nut and then put the hook knob on the bracket;

Hook
Bracket
Gasket
Nuts
wrench

2. Use 4pcs screws to lock the ring & bracket assembly to the lamp body;


screw

3. Hang up the light.

Wiring Connection

Turn off the power, connect AC wire. black wire to L, white wire to N, and green wire to E.
Dimmer connection (with dimmable driver.)

1. Compatible with 1-10V dimming.
2. Connect wires as below, purple wire is D+, gray wire is D-, cap pink wire.

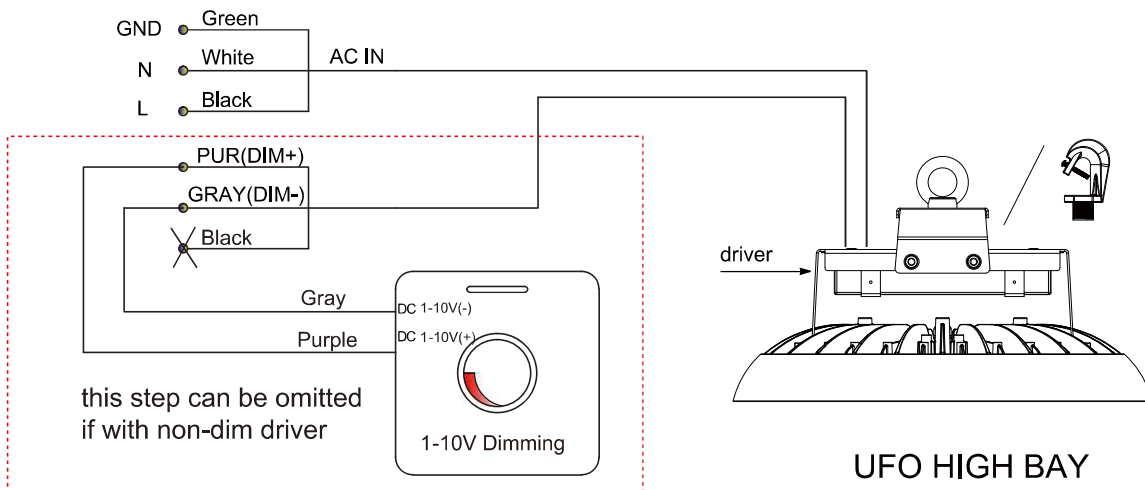



Packing information

Power	Outer box (L*W*H)	Oty/Ctn (pcs)	N.W./Ctn (kg/lbs)	G.W./Ctn (kg/lbs)	Remarks
100W	12.40"x12.40"x7.24" (315x315x184mm)	1	2.8/6.17	3.6/7.94	2M cable
150W	13.70"x13.70"x7.64" (348x348x194mm)	1	3.8/8.38	4.6/10.14	
200W	14.88"x14.88"x8.19" (378x378x208mm)	1	5.1/11.24	6.2/13.67	
240W	14.88"x14.88"x8.19" (378x378x208mm)	1	5.2/11.46	6.3/13.89	
300W	21.06"x21.06"x8.46" (535x535x215mm)	1	9.05/19.95	11.3/24.91	

Applications



Industrial application:
Warehouse, Factory etc.



Commercial application:
Exhibition Room, Gas Station,
Supermarket etc.

Note

1. Please let professionals install the lamp;
2. Please cut off the power supply if any abnormal situation;
3. Please clean the glass of high bay light regularly, to keep great lighting transmission;
4. Please clean the high bay light shell termly, to keep good heat dissipation;
5. Please use the dry cloth to clean it only, not by water or caustic solution;
6. Lamp earthing is necessary;
7. High voltage inside, please don't remove it in case of electric shock;
8. Glass accessory included, please take care of it when using and storage, avoid high pressure on it;