



COMMERCIAL
LIGHTING SERVICES




Specifications

T8 VAPOR LIGHT (2 TUBES)



IP65

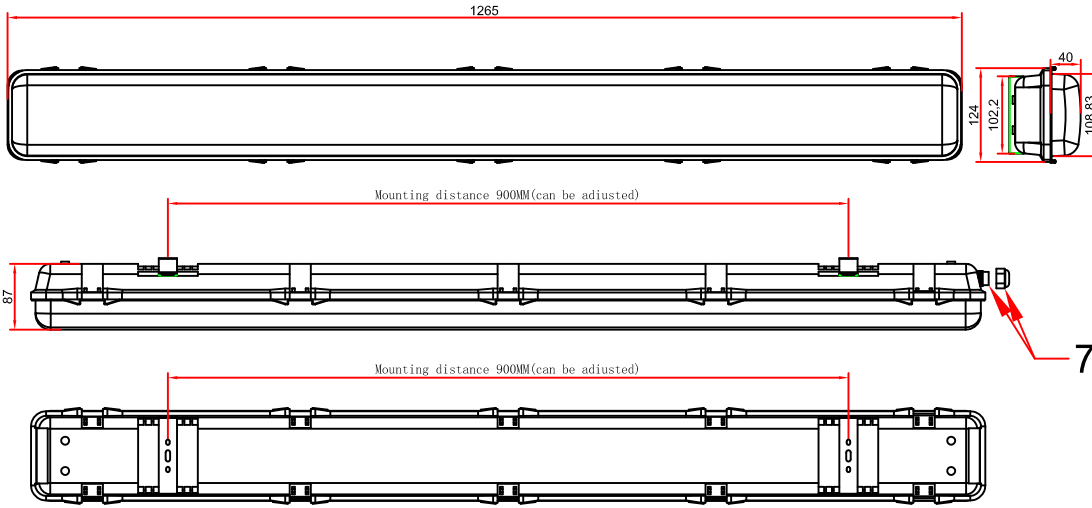


Chemical Resistance

Type	Medicine	Allelism
neutrality	15%calcium oxide	0
	10%magnesium oxide	0
	10% (15%) potassium oxide	0
	10%ammonium oxide	0
	15%sodium oxide	0
salt	15%ammonium oxide	0
	15%sodium carbide	0
alkali	10%ammonia water	0
acidity	10%hydrochloric acid	0
	40% (35%) hydrochloric acid	X
	10%acetic acid	0
	50%acetic acid	X
	10%(30%) hydrogen peroxide	X
	10%sulfuric acid	0
	70% (50%) sulfuric acid	X
	10%nitric acid	0
	20% (30%) nitric acid	X
	30%praseodymium acid	0
organic substances (alcohol solvent, etc.)	gasoline	X
	castor oil	0
	methyl alcohol	X
	isopropyl alcohol	0
	(95%)acetone	X
	benzene	X
	ethyl alcohol	X
	(95%) trichloromethane	X
	methylbenzene	X
	banana oil	X
gasoline	0	
methyl ether ketone	X	
(37%)formalin	0	

Details Drawing

Product shot

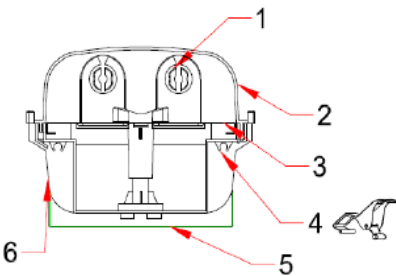

Notes for use

- Some machines of monitoring system (stealing-preventing system) sometimes will affect the cycle of converter and cause malfunction. Please confirm with the manufacturer of monitoring system in advance.
- Sometimes there is sound like "PP" when turn on or off the light. This is a scuffing noise caused by materials or components, not the abnormal state of instruments.
- Sometimes this instrument will degenerate in advance because of the environment. Please change the components in time according to regular checking of contractors and specialists.
- Please seal the inlet hole of power line.
- Please make sure the light has been turned off for more than 30 minutes while you want to wash the instrument with water.
- The protection grade from solid and water is IP65.



Safety precautions

- This instrument is airtight, anti-corrosion, blowout control and Medicine resistance refers to the form.
- This instrument is mounted on the ceiling board directly. Please do not mount it on the slant ceiling board, or it will drop off.
- It is used in door. Do not use it in place with direct sunlight, which may cause discoloring, deformation, fire and loss of life.
- Use it while the temperature is -35~45°C.
- Please use it with the assigned voltage, or the light may break and the tubes may drop off because of the oil.
- Make sure the power wire and ground wire have been connected. If the ground wire has not been connected, there maybe electric shock.

Confirmed by			way of power supply	(LED tube) single ended supply	Vapor Light (T8 LED 2 Tubes)			
ANDY	11				Model	assigned voltage	V	100-277V
	10							
	9							
JENNY	8	terminal unit	20A 600V	3	CE made in china	suited tube		T8 LED Tube
	7	coil protect(waterproof)	resin	1	gray			
	6	body	ABS	1	gray			
	5	hardware for installation	stainless steel	2	white t0.6			
YI SHUI	4	plastic snap button	ABS	10	gray	Foot		4FT
	3	reflecting board	22-gauge steel	1	high reflectance white coating			
YI SHUI	2	lamp holder	G13 socket	4	5VA UL/CE	weight		2.3 KG
	1	housing	PC	1	transparency			
No.	Name		material/thickness	quantity	for reference		picture No.	
2015	3D 0	Unit		MM	No. 3 horn cupping			

(II-1) Hi-quality spare parts



02

Wire: UL listed, 0.7MM Single core copper wire, bear 125°C heat, 5VA fire rating (fire retardant)

Terminal Blocks: UL listed, Made in Italy (A.A.G STUCCHI). They can ensure safety in using



03

Lamp holder :

UL listed, Made in Italy (A.A.G STUCCHI), G13 600V/600W. It can prevent tubes falling off.

