




Half Cut Off Wall Pack






Zonal lumen 0-90° >97%

Photocell Dusk to Dawn
(providing shorting cover)



High Quality Driver
Multi Voltage 100-277V/347V

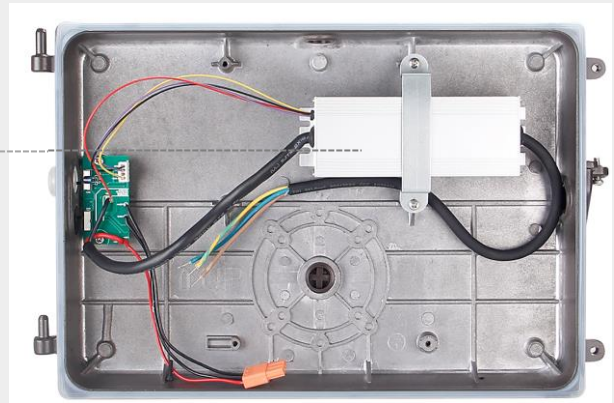

Saving Shipping cost Deign

Extremely compact and safety package design
40HQ Container can load around 3400pcs

Parameter

Model No.	TPGDWPNLA-120WJ
Wattage	120W
Luminous Efficacy	150lm/w
Lumens output	18000lm
HID/MF Equivalent	600W
Fixture Weight	3.9Kg(8.6lb)
LEDs Brand	Lumileds (Philips) SMD3030
CCT	5000K
CRI	70+ or 80+
Beam Angle	120°
Input Voltage	100-277Vac 50/60Hz
Function	Photocell, Motion Sensor, Emergency optional
Power Factor	>0.95
IP Rating	IP65 /Wet Location
Working Temp.	-30° C ~ 50° C (-22° F~122° F)
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)
Finish	Dark Bronze
Housing	Die-casting Aluminum
Diffuser	PC Cover
Installation	Mounting
Lifespan(L70)	>100,000 Hours
Certification	ETL, cETL, DLC Premium

Dimension

