



COMMERCIAL  
LIGHTING SERVICES




# Specifications


T8 WRAP LIGHT (3 TUBES)



This lighting fixture is environmental friendly.  
 The lighting fixture's body is made of steel plate without chromium.  
 There is lead-free wire in the lighting fixture.

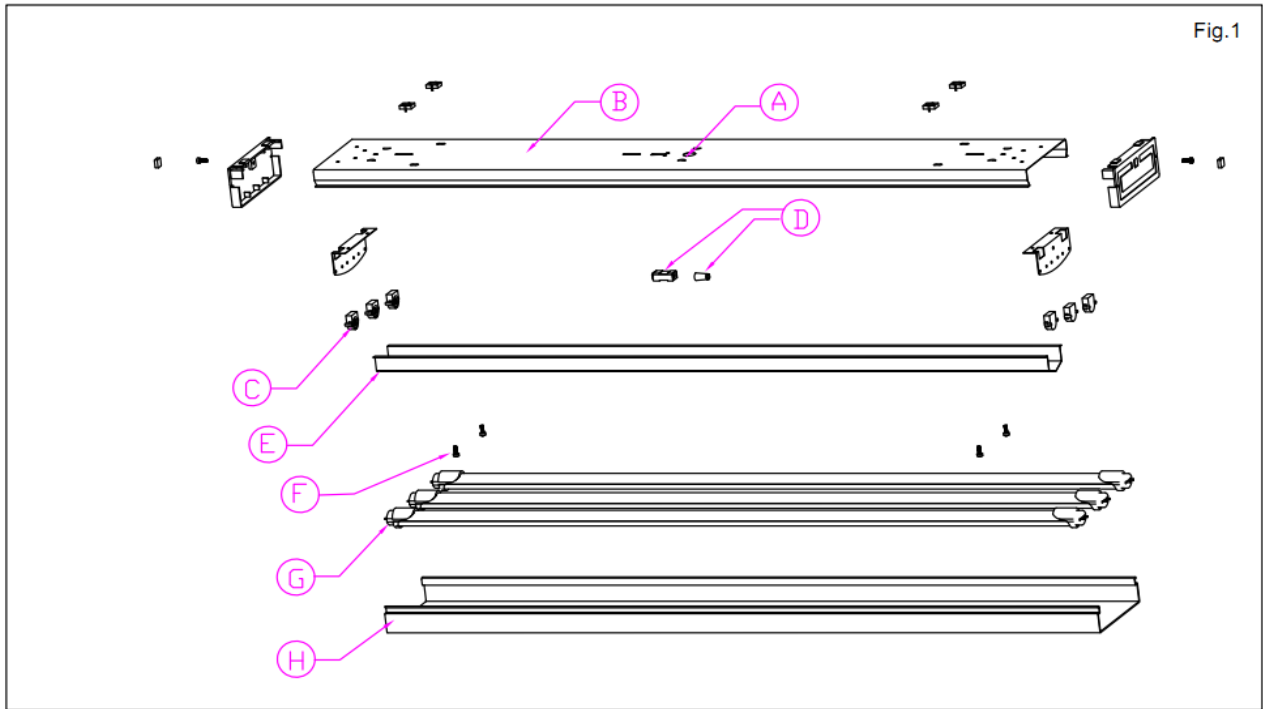

**Details**

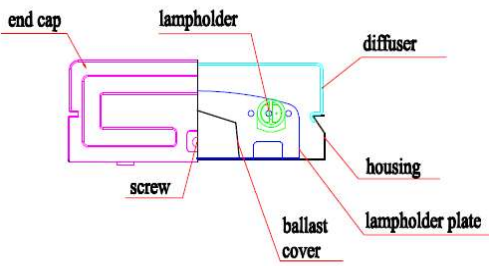

P  
i  
c  
t  
u  
r  
e



**Safety Caution**

1. This lighting fixture is used in doors. Do not use it in damp and corrosive place.
2. This lighting fixture is used in doors. Do not use it in place with wind blowing.
3. Please use it while the environment temperature is -5~35°C.
4. When you turn on the light, make sure the environment temperature is above -5°C. The light beam will be weakened and the life time will be shortened if the environment temperature is below -5°C.
5. Do not use it in the lampblack environment. The lampblack will make the lamp holder broken and the tube drop off.
6. Do not use other power supply voltage.
7. Make sure the power supply wire and ground wire are connected safely. If the ground wire has not been connected safely, it will cause electric shock.
8. Make sure the spacing distance between two fixtures is more than 10CM and the environment temperature is below 35°C.

**Precautions for use**

Some machines of the monitoring system (precaution induction) will affect the cycle of inverter and maybe cause malfunction. Please confirm with the monitoring system's manufacturer before using.


Precautions for use				way of supply	(LED tube) single ended supply	Wrap Light (LED 3 Tubes) 7"*4'		
Check	No.	Name	Material/Thickness			quantity	type	rated voltage
Andy	9					cycle	V	100-277V
	8							
	7							
	6	protective ring	ø20	1	PC			50/60Hz
Confirm	5	terminal unit	20A 600V	2	UL certification	suited tube		T8 LED Tube
Jenny	4	body	22-gauge steel	1	white coating			
	3	resin screw	resin/steel	2	M4*18			
Design	2	lamp holder	PBT (G13 socket)	6	UL certification	Watts/Foot		4'
Yi Shui	1	reflecting board	prismatic plastic cover	1	PC	fixture weight		2.8 KG
	No.							
2015	3D 0		Unit MM NO. 3 angle method					

**(II-1) Hi-quality spare parts**



02

**Wire:** UL listed, 0.7MM Single core copper wire, bear 125°C heat, 5VA fire rating (fire retardant)  
**Terminal Blocks:** UL listed, Made in Italy (A.A.G STUCCHI). They can ensure safety in using

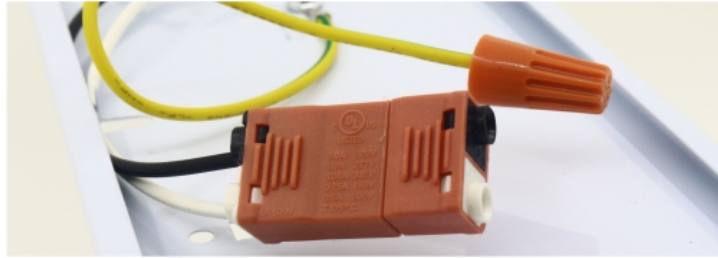

03

**Lamp holder :**

UL listed, Made in Italy (A.A.G STUCCHI), G13 600V/600W. It can prevent tubes falling off.

